REVISIONS				
LOC	LTR	DESCRIPTION	DATE	APPROVED

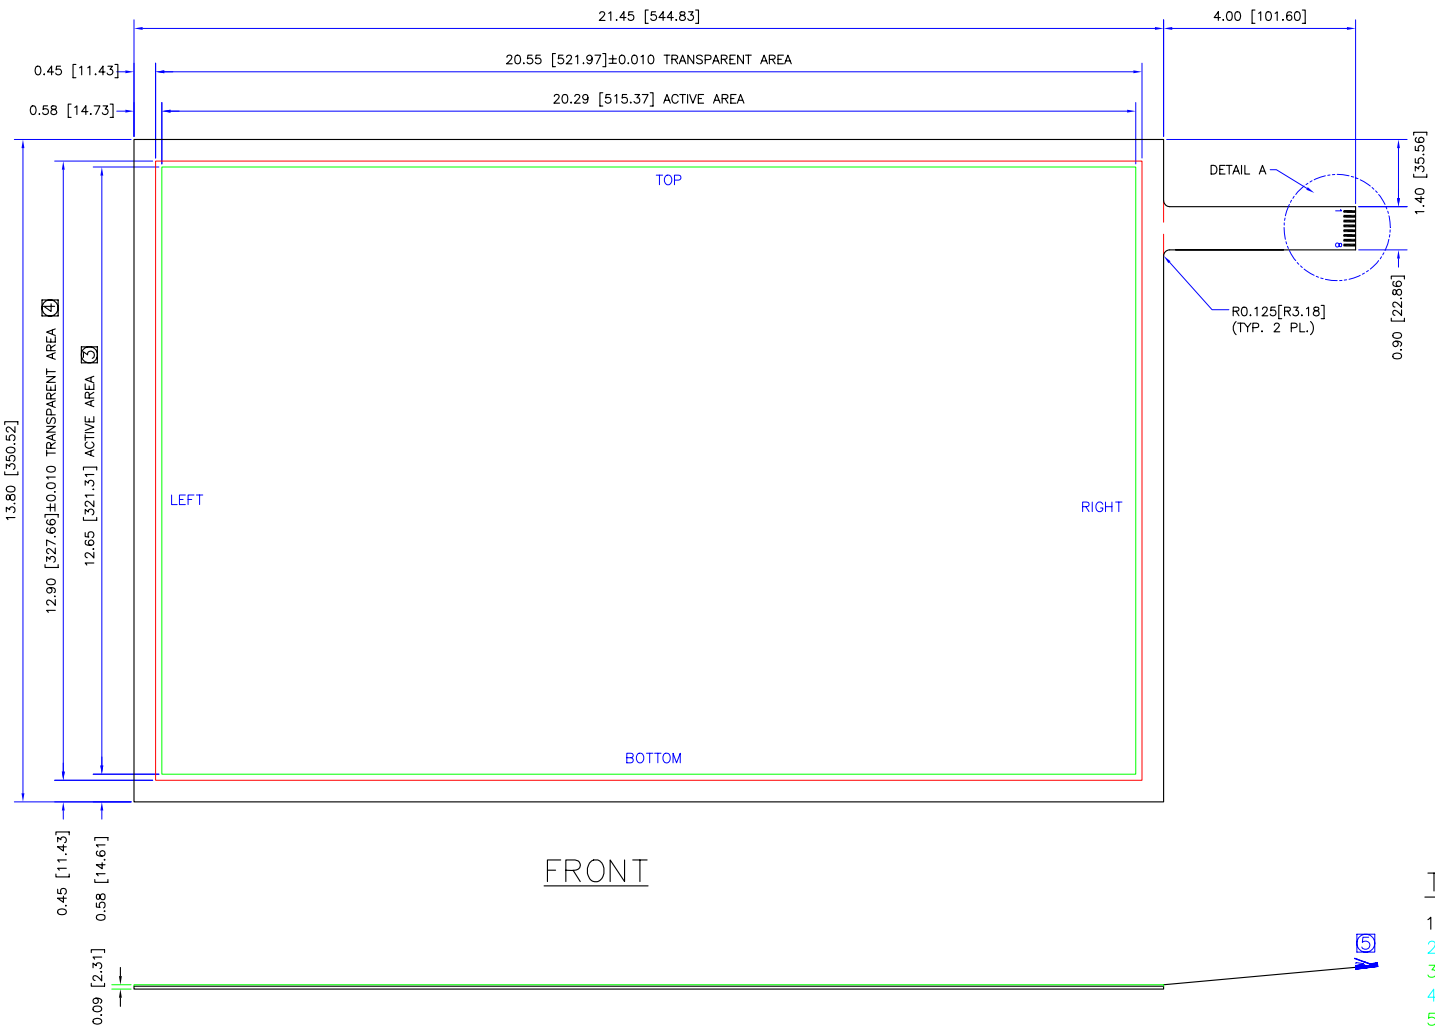

FRONT

PINOUTS	
PIN	ASSIGNED
1	TOP EXCITE
2	TOP SENSE
3	BOTTOM SENSE
4	BOTTOM EXCITE
5	RIGHT EXCITE
6	RIGHT SENSE
7	LEFT SENSE
8	LEFT EXCITE



DETAIL A



TOUCH SCREEN CROSS SECTION

1. SUPPORT: 0.060 THK. STRENGTHENING GLASS
2. ADHESIVE: 0.004 ACRYLIC
3. STATIC ELEMENT: 0.007 POLYESTER
4. PERIPHERAL ADHESIVE: 0.004 ACRYLIC
5. DYNAMIC ELEMENT: 0.007 POLYESTER
6. ADHESIVE: 0.004 ACRYLIC
7. OVERLAY: 0.005 90% AR/AG

5 CONNECTORS: BERG CLINCHER (65801-008) OR EQUIV.
ADD 0.300 TO LENGTH OF TAIL

4 TRANSPARENT AREA: 12.90 x 20.55

3 ACTIVE AREA: 12.65 x 20.29

2 ACTUATION FORCE: 20-40 GRAMS

1 ITO RESISTIVITY: 200 / 300 OHMS / SQ.

NOTES: (UNLESS OTHERWISE SPECIFIED)

THIS DRAWING AND THE DESIGN SHOWN THEREBY IS THE PROPERTY OF CyberTouch ITS DISCLOSURE AND DISTRIBUTION IS FOR A LIMITED PURPOSE ONLY; ANY USE BEYOND SUCH LIMITATION IS NOT AUTHORIZED: NO REPRODUCTION THEREOF IS LISCENSED, BEYOND THE LIMITED PURPOSE FOR WHICH THE DRAWING IS SUPPLIED. THIS DRAWING AND ALL COPIES THEREOF SHALL REMAIN THE PROPERTY OF CyberTouch AND MUST BE RETURNED TO CyberTouch ON REQUEST

APPROVALS				
DATE	REV.	INITS.		
		ENG.		
		ADL.	APPROVALS	DATE
		MAN.	DESIGN A. GOHARI	030507
		Q.A.	CAD S. LOERA	030507
CUSTOMER APPROVAL				

TOLERANCES UNLESS OTHERWISE SPECIFIED
.X ±.15 .XX ±.010 .XXX ±.005

CyberTouch
Touch Screens.Touch Monitors.Touch Systems
(805)499-5000
www.cybertouch.com

TITLE
SAMSUNG
LCD/TOUCH SCREEN

SCALE 1:0.25
PART NO. 9786G-B0-D0-0A
SHEET 1 OF 1