| REVISIONS | | | | |
|---|---|---|---|---|
| LOC | LTR | DESCRIPTION | DATE | APPROVED |
| | | | | |

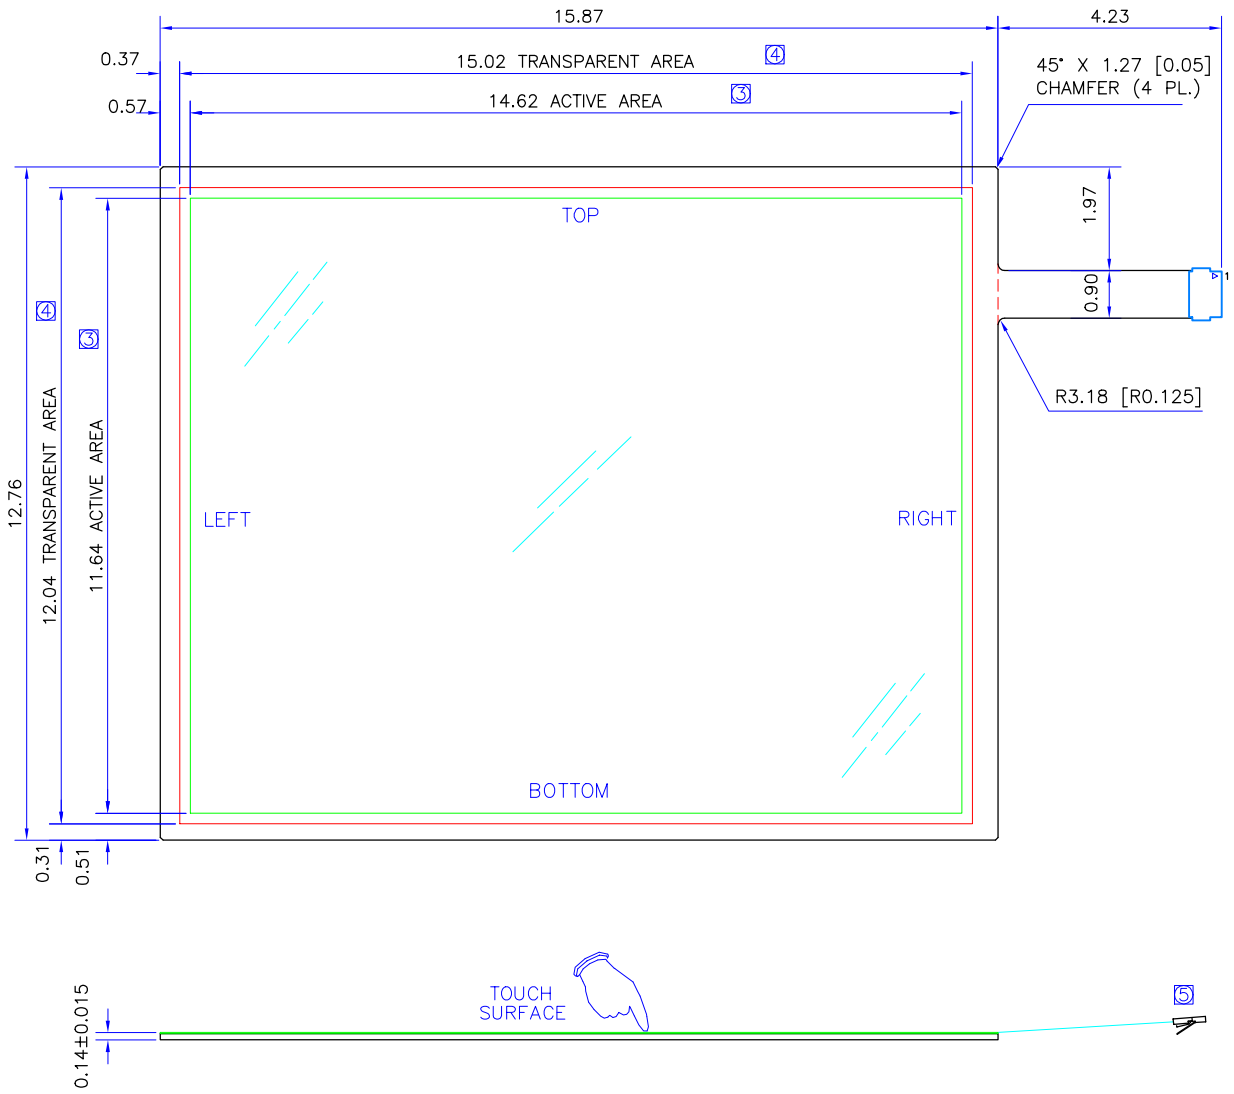


| PINOUTS | |
|---|---|
| PIN | |
| 1 | LEFT EXCITE |
| 2 | LEFT SENSE |
| 3 | RIGHT SENSE |
| 4 | RIGHT EXCITE |
| 5 | TOP EXCITE |
| 6 | TOP SENSE |
| 7 | BOTTOM SENSE |
| 8 | BOTTOM EXCITE |




## TOUCH SCREEN CROSS SECTION

1. DYNAMIC ELEMENT: POLYESTER
2. ADHESIVE: ACRYLIC
3. STATIC ELEMENT: POLYESTER
4. ADHESIVE: ACRYLIC
5. SUPPORT: STRENGTHENED GLASS

5 CONNECTOR: BERG CLINCHER (65801-008) OR EQUIV.

4 TRANSPARENT AREA: 12.04 X 15.02

3 ACTIVE AREA: 11.64 X 14.62

2 ACTUATION FORCE: 20-40 GRAMS

1 ITO RESISTIVITY: 200-300 OHMS/SQUARE

NOTES: (UNLESS OTHERWISE SPECIFIED)

THIS DRAWING AND THE DESIGN SHOWN THEREBY IS THE PROPERTY OF CyberTouch ITS DISCLOSURE AND DISTRIBUTION IS FOR A LIMITED PURPOSE ONLY; ANY USE BEYOND SUCH LIMITATION IS NOT AUTHORIZED; NO REPRODUCTION THEREOF IS LISCENSED, BEYOND THE LIMITED PURPOSE FOR WHICH THE DRAWING IS SUPPLIED. THIS DRAWING AND ALL COPIES THEREOF SHALL REMAIN THE PROPERTY OF CyberTouch AND MUST BE RETURNED TO CyberTouch ON REQUEST

| APPROVALS | | | |
|---|---|---|---|
| DATE | REV. | INITS. | |
| | | ENG. | |
| | | ADL. | |
| | | MAN. | |
| | | Q.A. | |
| CUSTOMER APPROVAL | | | |

TOLERANCES UNLESS OTHERWISE SPECIFIED
.X .XX .XXX
±.762 ±.381 ± .127

| APPROVALS | DATE |
|---|---|
| DESIGN A. GOHARI | 101705 |
| CAD N. FRANCISCO | 101705 |

CyberTouch
Touch Screens.Touch Monitors.Touch Systems
(805)499-5000
www.cybertouch.com

TITLE
# 8-WIRE ANALOG FLAT TOUCH SCREEN

SCALE 1:0.275
PART NO. 7098A-B0-C0-0A
SHEET 1 OF 1